
WALL PANEL 50 MOTION




KURAGE

WALL PANEL 50 MOTION

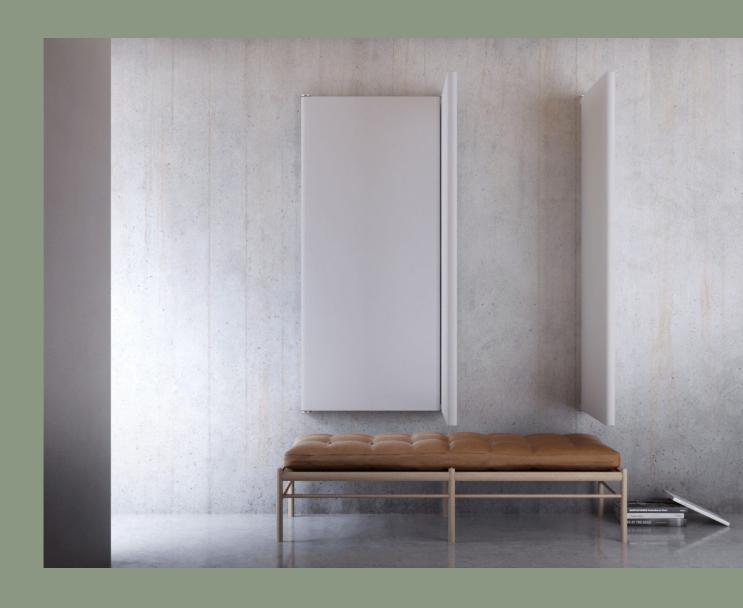

SPECIFICATIONS

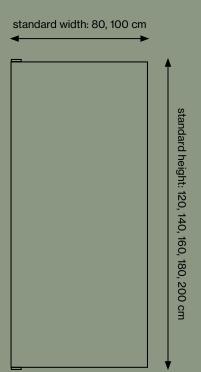

The cover has elastics sewn on, ensuring a constant tightening of the fabric.

Cover is detachable and can be dry-cleaned.


Possibility for printed as well as plain textiles.

Visible frame of extruded aluminium.

Acoustic core of stone wool/mineral wool made from natural minerals.

Thickness: 54 mm.


In addition to standard dimensions we also supply special dimensions.



WALL PANEL 50 MOTION


ACOUSTIC PROPERTIES

ISO TEST 354 WALL PANELS 50 (MOTION CLOSED)

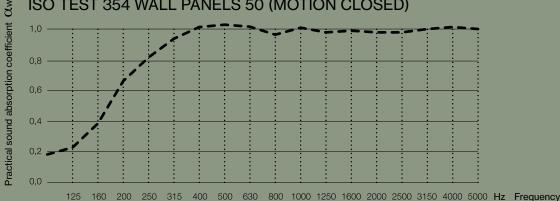

Practical sound absorption coefficient according to ISO 11654 (X,w =1,0 absorption class: A


ISO TEST 354 FLOOR 50 (MOTION OPEN)

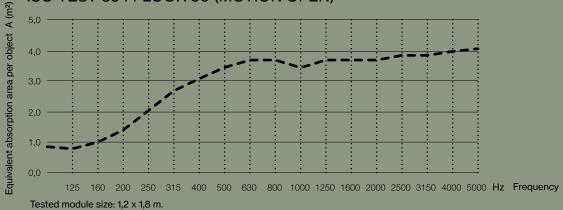


KURAGE www.kurage.com

WALL PANEL 50 MOTION

ACCESSORIES



Wall bracket article no. 5010



Wall bracket article no. 5010



Wall bracket article no. 5010